



Outstanding rough terrain driving features

- 4 wheel drive and steer
- Oscillating axle
- Differential wheel lock
- 38 cm ground clearance

Optimal productivity

- The tightest turning radius on the market
- Up to 3 simultaneous and proportional movements
- Max. outreach of 19.8 m
- Continuous outreach control



Haulotte 
GROUP

More than lifting





HA41 PX-NT




ROUGH TERRAIN ARTICULATING BOOMS

TECHNICAL DATA

HA41 PX-NT

Working height	41.5 m
Platform height	39.5 m
Horizontal outreach	19.8 m
Up and over clearance	17.75 m
Lift capacity	230 kg
F x G Platform size	2.44 x 0.8
H Length	12.6 m
A Transport length	11 m
B Width	2.5 m
Width - with extended axles	3.33 m
C Height - stowed	2.99 m
J Transport height	3.7 m
Vertical jib rotation	130° (+65/-65)
Platform rotation	180° (+90/-90)
Turntable rotation	360°
Tailswing	3.88 m
D Wheelbase	3.5 m
E Ground clearance	38 cm
Tilt	4°
Drive speed	0.5 - 5 km/h
Gradeability	40 %
Turning radius - outside	5.75 m
Tires - foam-filled	445/65-22.5
Power source	62 kW - 84.2 hp
Weight	23000 kg

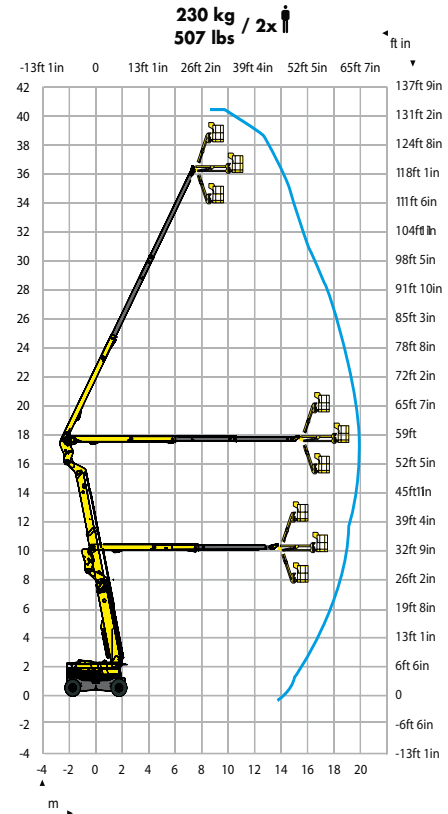


STANDARD EQUIPMENT

- Simultaneous and proportional movements to maximize productivity
- 4 wheel drive and steer
- 2 extendable axles
- Hydrostatic transmission
- Ergonomic control panel
- Maintenance made easy: swing out engine tray
- Gull wing style cowlings
- Automatic platform levelling
- Safe to use in winds up to 45km/h / 28mph
- Tilt controller
- Load Managing System in the platform
- Auxiliary power in the platform for emergency descent
- Towing hooks
- Horn
- Hourmeter
- Power to platform

OPTIONS AND ACCESSORIES

- Rotating beacon
- Travel alarm
- Working light
- On-board generator
- Biodegradable hydraulic oil

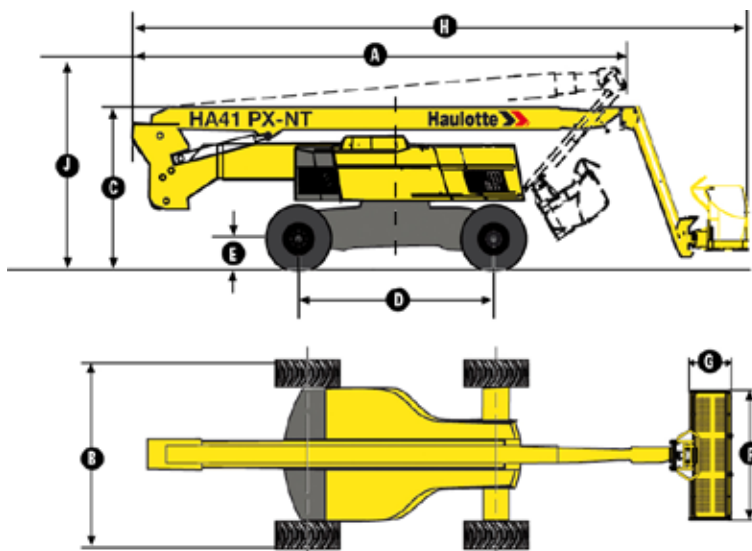

Authorised Reseller : Shakti Equipments Pvt. Ltd.

Block No. 140, Near Vitawa Octroi Naka, Thane Belapur Road, Vitawa, Thane West - 400 605.

Tel: +91 - 22 - 2542 0127 Email: info@shaktiequipments.com